



DRAINAGE WASHER HIDRO-JET/BI 300

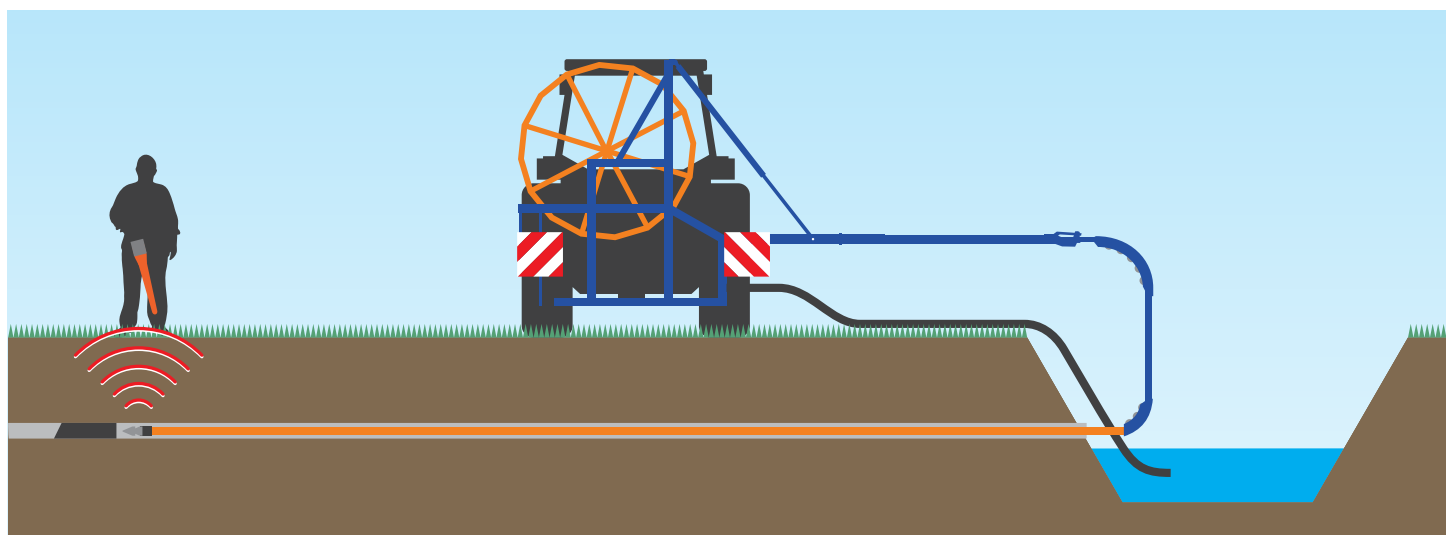

Easyloc Tx Signal Transmitter

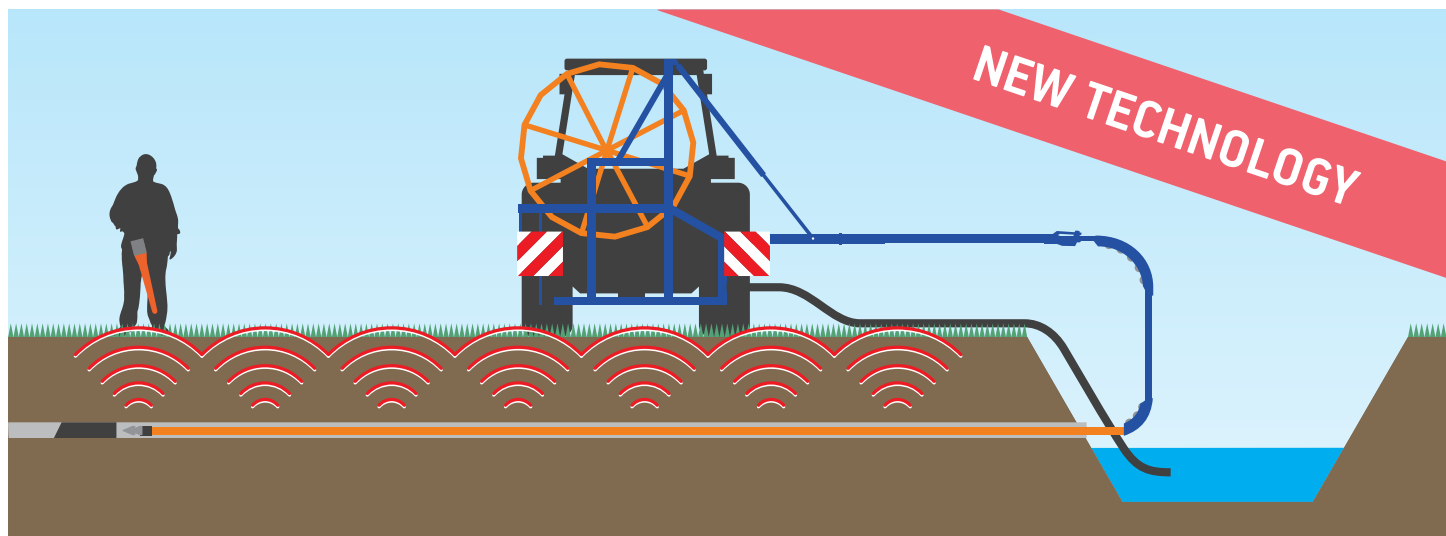

Reflective columns for wells (wells) and for all

Drainage washer HIDRO-JET/BI 300



Easy and efficient washing of drainage systems

A well-functioning drainage system improves the condition of arable land, an important prerequisite for high yields. In fields with a functioning drainage system, the plants germinate and grow evenly, allowing for the reduction of losses due to flooding of "wet places" and fields. A functioning drainage system is particularly needed for wet fields. Washing the drainage system with the HIDRO-JET/BI 300 is simple and safe - the powerful 300 m long washing pipe with hydraulic drive is used to insert the drainage well, a washer head with a 6 + 1 or 12 + 1 holes to clean the drain pipe from mud and plant roots. Adjustable hydraulic height and length of the unit, horizontal adjustment of the hydraulics for convenient and efficient operation of the equipment.

Technical data

Weight	
Empty	810 kg
Filled with water	960 kg
Dimensions	
1,45 m x 2,50 m x 3,20 m	
Fastening	
Three-point hitch	
Pump	
3-part diaphragm pump	
Water pump	PTO drive
Propeller shaft drive	
Maximum capacity	125 l/min – 50 bar – 550 rpm
Recommended operating mode	110 l/min – 25-35 bar – 550 rpm

Hydraulics	
Hydraulic system	3 hydraulic motors / 3 cylinders
	4-part hydraulic divider
	2 flow control throttles
Tractor hydraulics	Two-way connection
Pipe Washing pipe	300m or 500m PPP pipe, Ø 27mm x 5.5mm
Sprayer head	Standard 12 + 1 hole or 6 + 1 hole of 2 mm
Meter counter	Serial
Drive	3 hydraulic motors with 4 drive wheels and 2 control valves
Operating speed	Maximum 20-30 m/min
Pipe installation/pulling out	Hydraulic installation/pulling out
Pipe guidance	Automatic pipe guidance
	Hydraulic height and length adjustment
	Horizontally adjustable hydraulics
Control	Hydraulic, with levers
Warranty	1 year